



Cross Over Connectors
Adaptor and Spacer Spools

Special connectors

Double Studded Adaptor Flanges, Spools and Crossover Flanges

In Line Valve manufacture and supply API crossovers, adaptor flanges and spools for drilling and completions.

Manufactured in accordance with ISO 10423 these items are manufactured in a range of materials from low alloy to stainless steels and corrosion resistant alloys.

Double studded adaptors

Typical DSA sizes include:-

3-1/8", 4-1/16", 7-1/16", 9", 11", 13-5/8"

Standard pressure ratings of:-

2000, 3000, 5000, 10.000 and 15.000 psi

Standard materials include:-



UNS G41300—Low Alloy Steel

UNS S4100—13% Cr Stainless Steel

UNS S31803—25% Cr Duplex Stainless Steel

UNS G 41300 with overlay of UNS N06625 CRA

Ring grooves and flow bores also available with overlay of 316 Stainless steel or overlay of Corrosion Resistant Alloy.

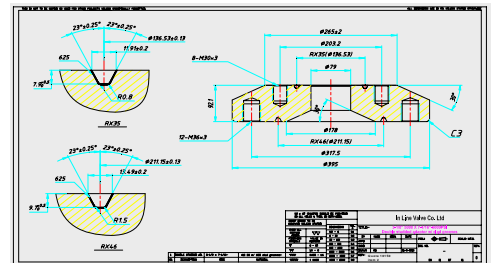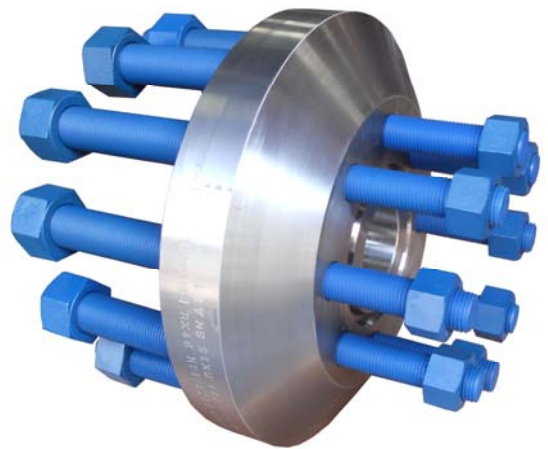

Spools

Allowing venting of drilling and other fluids



Cross over flange

Between API and union type connections

